## **BPBI0320**

Upload-pressurized Automatic Sphygmomanometer.



# Measuring blood pressure is one of the fundamental steps for maintaining a healthy lifestyle

Blood screening is basic to health check up.

BPBIO320 enables maintenance of health and lifestyle by allowing quick, easy and accurate blood pressure measurement.



\* The BPBIO320 desk and chair option allows for an even safer use of BPBIO320. (optional)

### Convenience is also technology.

## **BPBI0320**

Simple and chic design with 3 different color schemes.








#### **Functions of BPBIO320**

- 1 Flexible cuff guide ring that allows for accurate measurement of larger arm sizes  $(18 \sim 42 \text{cm})$
- 2 Comfortable and painless measurement with the air pouch insulation and the cuff
- **3** Biotechnological design that ensures the right posture
- 4 Wide LED screen for easy checking of all results (systolic, diastolic, and pulse rate), LED light guides the process of measurement and indicates current time
- 5 One-touch check for reviewing and printing past results
- **6** 'Print' button for an easier test Larger buttons for easier recognition
- 7 High-speed thermal printer with automatic cutter for a clean and quick printing Two different printing options available

Graph printing



3 Line printing

\* MEASURE TIME: 10/05/06 14:00 Systolic: 120 mmHg Diastolic: 79 mmHg Pulse: 76 bpm

**8** Emergency closing during measuring process if necessary

BPBIO320's user-friendly design enables easy and accurate use for not only

Outpatient clinics at hospitals or diagnostic purposes, public health centers

Recreational facilities, such as hotels or condominiums



Rest areas in companie or training centers





s, factories

Schools, military, or religious institutions



Sports centers, golf clubs, spa, sauna, or martial art centers



Public service areas in government organizations, banks or financial institution, or other public facilities, such as the subway

Private hospitals, Oriental-medicine clinics, rehabilitation, special diagnostic centers

### Upload-pressurized Automatic Sphygmomanometer BPBIO320 gives accurate and less painful results.




The BPBIO320 resolves the two most common problems associated with the automatic sphygmomanometers: the painful measuring process from excessive pressure and inaccurate results.

In order to locate systolic and diastolic points, previous models of automatic sphygmomanometer increased the pressure applied regardless of the each patient's blood pressure. It caused unnecessary pain as well as less reproducibility when repeating measurement due to the residual effects. BPBIO320 increases the pressure only up to the patient's systolic pressure to measure the systolic and diastolic blood pressure, allowing for minimal discomfort and minimal residual effects resulting from less pressure put. Also, it resolved the problem of prolonged measuring time from previous upflow-pressurized sphygmomanometers by using the individualized pressure according to the patient's heart rate.


#### BPBIO320 is user-friendly and has all necessary components.

- Automatic energy saving mode 2 minutes after the measurement is taken
- · Leads accurate measurement accounting for body movement
- · Enhanced comfort using the compressor belt
- 3 color schemes
- · Wide LED screen to easily read results
- 2-step security component for any emergency
- Printing and saving error codes for quick and complete customer service
- Body type analysis

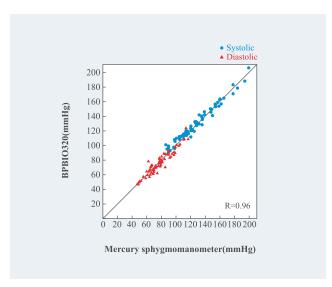



Mercury sphygmomanometer correlation study shows that BPBIO320 is very accurate.

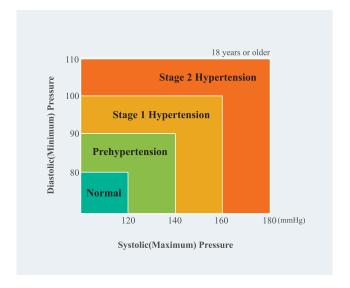

InBody has adopted the NIH Blood Pressure Guideline

#### **BPBI0320** Specifications

#### **Key Specifications**

Measuring Method Oscillometric

\* Pressurizing Method Automatic pressurization by air pressurization speed controller micro pump

Depressurizing Method Exhaust by micro valve

Cuff Pressurizing belt method by gear motor, Automatic operation

Measurement Range 0~300mmHg(Pressure), 30~240 bpm(Pulse)

Accuracy  $\pm 3$ mmHg(Pressure),  $\pm 2$ %(Pulse)

Measurement Result Systolic & Diastolic Blood Pressure, Pulse

Measurement Duration Average 40sec.(30~60sec. depending on the pulse rate or blood pressure)

Display Unit 1mmHg

#### **Feature Specifications**

Display Mode 7-segment LED(Systolic, Diastolic, Time, Pulse)

Type of Results Sheet Express Print / Graphs Print

\* Safety Device - If you press on the EMERGENCY button, the cuff will become loose for deflation.

(Dual safety device system that cuff will become loose for deflation regardless of the central controller)

- If you press on the START/STOP button, the cuff will become loose for deflation.

- If the air pressure surpasses 300mmHg, the cuff will automatically deflate and loosen.

Printer Express thermal printer with automatic cutter
Option Personal desk, Height controllable chair

#### **Other Specifications**

Power Source AC 100~120/200~240V, 50/60Hz

Power Consumption 60VA

Dimensions  $489 \text{ (W)} \times 409 \text{ (L)} \times 284 \text{ (H)}: \text{ mm}$ 

 $19.3 \text{ (W)} \times 16.1 \text{ (L)} \times 11.2 \text{ (H)}$ : inch

Machine Weight 9kg(19.8lbs)

Operation Environment  $10 \sim 40^{\circ} C(50 \sim 104^{\circ} F), \ 30 \sim 75\% RH, \ 70 \sim 106 kPa$ 

Storage Environment  $-20 \sim 50^{\circ}\text{C}(-4 \sim 122^{\circ}\text{F}), 10 \sim 95\%\text{RH}, 50 \sim 106\text{kPa}(\text{No condensation})$ 



InBody is a body composition analysis device manufacturer that has acquired over 80 patent rights across the globe.















#### InBody

InBody Co., Ltd. [HEAD OFFICE] TEL: +82-2-501-3939

FAX: +82-2-578-2716 Website: http://www.inbody.com

Website: http://www.inbody E-mail: info@inbody.com InBody USA [USA]

TEL: +1-323-932-6503 FAX: +1-323-952-5009

Website: http://www.inbodyusa.com E-mail: USA@biospaceamerica.com InBody Japan Inc. [JAPAN]

TEL: +81-03-5298-7667 FAX: +81-03-5298-7668 Website: http://www.inbody.co.jp E-mail: inbody@inbody.co.jp Biospace China. [CHINA]

TEL: +86-21-64439738, 9739, 9705

FAX: +86-21-64439706

Website: http://www.biospacechina.com E-mail: info@biospacechina.com

<sup>\*</sup> Specifications are subject to be changed without prior notice.